


# FPCB Etching Carrier Tape

Tapex No.7252

## Features

- The special adhesive does not peel or dislocate during work.
- Excellent in chemical resistance and wettability
- Suitable for FPCB Etching Process

## Structure

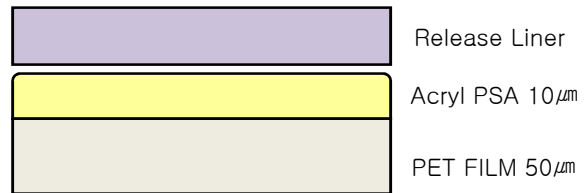

## Properties

ITEM	UNIT	No. 7252	REMARKS
Color	-	Transparent	
Type	Adhesive	Acrylic	
	Backing	PET	
	Liner	PET liner	
Thickness	$\mu$ m	60	Dial gauge (1/1000mm)
Adhesion Strength	$g_f / 25mm$ (Room Temp.)	8 ~ 15	[Pretreatment ] Pressing 2kg roll twice(300mm/min) 180°, 300mm/min peel test
	$g_f / 25mm$ [Heat-Bar Pressing]	12~ 20	[Adherend ] Poly Imide film [Heat Press] 180°C x 1hr, 4.5kgf/cm <sup>2</sup>

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

**TAPEX INC.**

94-5, Goju-ri, Paltan-myeon, Hwaseong-city, Gyeonggi-do, 445-912, Korea TEL.82.31.353.8930 FAX.82.31.352.7376